

CENTRIFUGAL HEAVY DUTY BLOWERS

We manufacture a wide selection of marine blowers for marine engine compartments in strong nylon PA6 material homologated by R.I.N.A and with different capacities from 280m³ up to 1000m³ per hour. Screws and shaft in stainless steel. Flex mount and very strong dynamic flange mount. Low current draw. Continuous duty. Best ratio on the market between volume air flow and compact size. All models are ignition protected ISO 8846.

Complying with ISO 8849, EN 55014, ISO 10133.

FEATURES

- Compact and simple design
- Flexible installation
- Quiet operation
- Long motor lifetime from powerful airflow cooling.
- Resistant pa66 nylon material housing.
- Efficient high volume air flow



280 mc/h

Flex < 550 mc/h



Flange Mount

Flex Mount

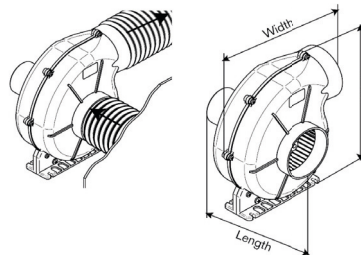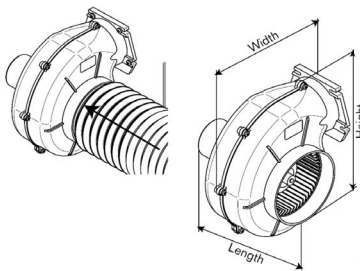

Flange < 550 mc/h

PART. N.	MODEL	VOLT	AMP	CAPACITY MCH/CFM	PORT CONNECTIONS	DIMENSIONS WIDTHxLENGHTxHEIGHT
5500001212	FLANGE 3"	12	3,8	280 / 163	Inlet: 75 mm - Outlet: 72 mm	200 x 165 x 195 mm
5500001224	FLANGE 3"	24	2	280 / 163	Inlet: 75 mm - Outlet: 72 mm	200 x 165 x 195 mm
5500101212	FLANGE 4"	12	12	550 / 344	Inlet: 100 mm - Outlet: 103 mm	290 x 257 x 150 mm
5500101224	FLANGE 4"	24	6	550 / 344	Inlet: 100 mm - Outlet: 103 mm	290 x 257 x 150 mm
5500101412	FLANGE 6"	12	10	750 / 441	Inlet: 150 mm - Outlet: 103 mm	290 x 257 x 170 mm
5500101424	FLANGE 6"	24	5	750 / 441	Inlet: 150 mm - Outlet: 103 mm	290 x 257 x 170 mm
5500101624	FLANGE 6"	24	9	1000 / 589	Inlet: 150 mm - Outlet: 103 mm	290 x 257 x 180 mm
5500102212	FLEX 4"	12	12	550 / 344	Inlet: 100 mm - Outlet: 110mm	290 x 257 x 150 mm
5500102224	FLEX 4"	24	6	550 / 344	Inlet: 100 mm - Outlet: 110mm	290 x 257 x 150 mm
5500102412	FLEX 6"	12	10	750 / 441	Inlet: 150 mm - Outlet: 110 mm	290 x 257 x 170 mm
5500102424	FLEX 6"	24	5	750 / 441	Inlet: 150 mm - Outlet: 110mm	290 x 257 x 170 mm
5500102624	FLEX 6"	24	9	1000 / 589	Inlet: 150 mm - Outlet: 110 mm	290 x 257 x 180 mm