
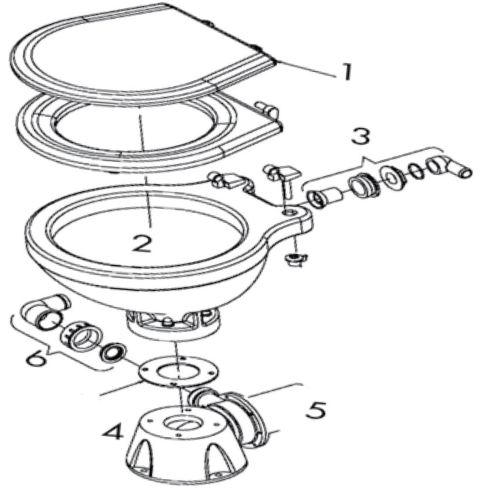


ELECTRIC TOILET SILENT SPARE VALID FOR MODELS		COMMON SPARES		
6600200712	ELECTRIC TOILET COMPACT 12V. SOFT CLOSE S	5600000405	4	BASE GROUP
6500000002	soft close seat compact	6000002112	5	MOTOR GROUP 12V.
5600000712	kit conversion 12v	6000002124	5	MOTOR GROUP 24V.
6500000505	bowl compact	5600000407	6	OUTLET ELBOW
6600200724	ELECTRIC TOILET COMPACT 24V. SOFT CLOSE S	6500000551	3	intake elbow
6500000002	soft close seat compact			
5600000724	kit conversion 24 v			
6500000505	bowl compact			
6600200812	ELECTRIC TOILET COMFORT 12V.SOFT CLOSE S			
6500000004	soft close seat comfort			
5600000712	kit conversion silent 12v			
6500000509	bowl comfort			
6600200824	ELECTRIC TOILET COMFORT 24V.SOFT CLOSE S			
6500000004	soft close seat comfort			
5600000724	kit conversion silent 24 v			
6500000509	bowl comfort			
ELECTRIC TOILET SILENT LAGUNA SPARE VALID FOR MODELS		COMMON SPARES		
6600200912	ELECTRIC TOILET COMPACT 12V.soft c. SEAT	5500019008	A	PLASTIC BASE LAGUNA AND DELUXE STD/LOW
6500000002	soft close seat compact	6000019012	B	ELECTRIC MOTOR 12V. LAGUNA AND DELUXE STD/LOW
5500019712	kit conversion silent laguna 12v	6000019012	B	ELECTRIC MOTOR 24V. LAGUNA AND DELUXE STD/LOW
6500000512	bowl laguna	6500000551		intake elbow laguna/deluxe/luxury
6600200924	ELECTRIC TOILET COMPACT 24V. Soft c. SEA	5500019706	C	OUTLET ELBOW LAGUNA AND DELUXE STD/LOW
6500000002	soft close seat compact	5500019705	D	HOSES KIT FOR LAGUNA SILENT
5500019724	kit conversion silent laguna 24 v			
6500000512	bowl laguna			
ELECTRIC SILENT DELUXE/LUXURY SPARE VALID FOR MODELS		COMMON SPARES		
65000003212	HYDRO-VACUUM TOILET 12V. "Deluxe" STD	5500019008	A	PLASTIC BASE LAGUNA AND DELUXE STD/LOW
6500000008	SEAT FOR DELUXE colbam	6000019012	B	ELECTRIC MOTOR 12V. LAGUNA AND DELUXE STD/LOW
6500000542	NEW DELUXE TOILET BOWL STD	6000019012	B	ELECTRIC MOTOR 24V. LAGUNA AND DELUXE STD/LOW
5500019812	DELUXE HYDRO-VACUUM KIT 12V.	6500000551		intake elbow laguna/deluxe/luxury
65000003224	HYDRO-VACUUM TOILET 24V. "Deluxe" STD	5500019706	C	OUTLET ELBOW LAGUNA AND DELUXE STD/LOW
6500000008	SEAT FOR DELUXE colbam	5500019805	D	HOSES KIT FOR DELUXE/LUXURY
6500000542	NEW DELUXE TOILET BOWL STD			
5500019824	DELUXE HYDRO-VACUUM KIT 24V.			
6500002042	HYDRO-VACUUM TOILET 12V. "Luxury" LOW			
6500000007	SEAT FOR LUXURY SOFT CLOSE			
6500000545	NEW LUXURY TOILET BOWL LOW			
5500019812	DELUXE HYDRO-VACUUM KIT 12V.			
6500002044	HYDRO-VACUUM TOILET 24V."Luxury" LOW			
6500000007	SEAT FOR LUXURY SOFT CLOSE			
6500000545	NEW LUXURY TOILET BOWL LOW			
5500019824	DELUXE HYDRO-VACUUM KIT 24 V.			
6500002242	HYDRO-VACUUM TOILET 12V. "Luxury" STD			
6500000007	SEAT FOR LUXURY SOFT CLOSE			
6500000547	NEW LUXURY TOILET BOWL STD			
5500019812	DELUXE HYDRO-VACUUM KIT 12V.			
6500002244	HYDRO-VACUUM TOILET 24V."Luxury" STD			
6500000007	SEAT FOR LUXURY SOFT CLOSE			
6500000547	NEW LUXURY TOILET BOWL STD			
5500019824	DELUXE HYDRO-VACUUM KIT 24 V.			
				

IMPORTANTE: LE ISTRUZIONI DI MONTAGGIO SARANNO PRESTO DISPONIBILI IN ITALIANO: WWW.MATROMARINE.COM/OUR-PRODUCTS
IMPORTANT: LES INSTRUCTIONS DE MONTAGE SERONT DISPONIBLES BIENTOT AUSSI EN FRANCAIS: WWW.MATROMARINE.COM/OUR-PRODUCTS
IA INSTRUTIONES PARA E MONTAJES ESTARAN LISTAS EN LA MAS BREVIDAD POSIBLE EN ESPANOL : WWW.MATROMARINE.COM/OUR-PRODUCTS

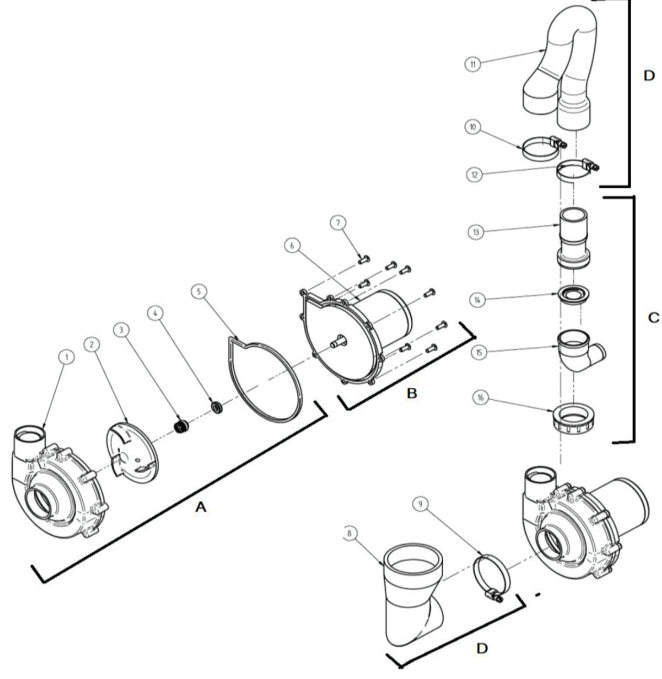

VACUUM HYDRO-SYSTEM

Complies with ISO 8846 MARINE [Ignition protection]. en 55014
The vacuum hydro-system toilet has been designed to comply with the latest anti-pollution regulations forbidding the discharge of sewage effluent within the 3 miles coastal limit. This toilet is able to operate with a very low water consumption (from 1 up to 5 litres) per cycle, which means a longer autonomy of operation of the water holding tanks. The vacuum model has been given a new and smart line. This very comfortable toilet is equipped with a device keeping the bowl always clean and it is much more noiseless than similar systems already on the market. Furthermore, it is also possible to employ a surge pump already installed on board, if any, or to make use of one only pump to get several toilets working.

1. Single vacuum hydro-system The single vacuum hydro-system is equipped with two separate pumps : the first one for water inlet and the second for water discharge. The inlet pump must be installed outside the bowl. The motor hollow or the bilge (to have less noisiness) near the sea-water intake valve could be a suitable place. The self-priming inlet pump is to be connected to the inlet pipe just after the sea-water intake and the safety handle valve. The inlet pipe must be positioned in its turn at least 50 cm. higher than the sea level. In case of installation under the sea level, a direct discharge ventilation valve (siphon break) is to be installed on the highest point of the inlet pipe. You will have then to connect the pipe to the back side of the bowl.

2. Centralized vacuum hydro-system: The centralized vacuum hidro-system needs for its working a pre-existent salt or fresh water pres-ured piping (2,5 or 3,5 bar). Therefore, you must connect the water pipe to the electrovalve and then to the rubber holder on the rear side of the bowl.


3. Single and centralized vacuum hydro-system The outlet macerator pump, which is located in the bowl, provides for the discharging of dirty waters. The outlet pipe having an inside diameter of mm. 38, must be connected to the back side of the bowl after the one-way valve made of black rubber. In case of installation under the sea level, as well as in case of direct discharging, the outlet pipe must build a siphon at 50 cm. at least above the sea level and a ventilation valve must be installed on its highest point (siphon break). In case of head outlet, the outlet pipe coming out of the bowl must go up immediately.

Electric connections: For a correct working of the toilet, the connections have to be made with the correct size wires (see table below). The circuit for the toilet power supply has to e independent and cannot be used for any other appliance. Connect the battery positive terminal to a fuse of adequate capacity load. The fuse has then to be connected next to the battery, in order to protect the feeding line in case of fault. Connect the electronic switch wires as follows :

1. **White wire to the battery positive wire**
2. **Brown wire to the positive (brown) wire of the water outlet pump**
3. **Blue wire to the negative (blue) wire of the water outlet pump**
4. **Grey wire to the battery negative wire**
5. **Black wire to the negative wire of the water inlet pump or electrovalve**
6. **Red wire to the positive wire of the water inlet pump or electrovalve**

CAUTION and SAFETY:

A correct motor polarity (red and brown wires to positive - blue and black wires to negative) is very important. A reverse polarity can damage the motor, thus voiding the warranty. For a correct functioning of the toilet, a full voltage to the motor is indispensable. Do not connect any other electrical appliances to the electric line of the bowl. Do not replace the supplied connecting plugs.

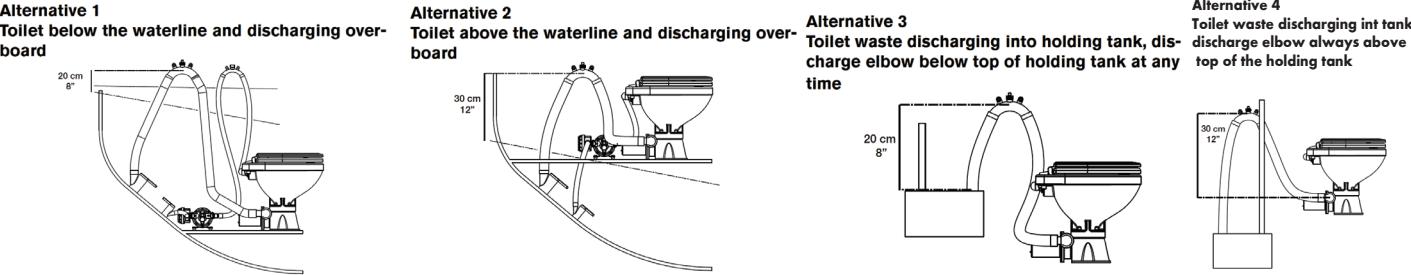

Technical specifications :
Voltage : : 12/24 Volt DC
Inlet pump consumption (single) : 9 A/ 4.5 A
Electrovalve consumption (centralized) : 1 A / 0.5 A
Outlet pump consumption : 18 A/ 10 A
Inlet pump : 1.2mt. self-priming, capacity 8-12- MAX 18/min.
Outlet pump : centrifugal, capacity 200 lt./min.
Inlet pipe : rubber pipe minimum internal dia. mm. 19
Discharging head : 5 meters upright
Outlet pipe : rubber pipe minimum internal dia. mm. 25 SUGGESTED 38 MM.

REMARKS :
From the "off" position, by pressing the "before use" button the bowl will be automatically filled up to the correct water level of 1 cm. above the outlet hole inside the ceramic bowl. However, according to the different methods of installation, an adjustment of thewater level could be needed. This can be done by rotating the shaft on the inside of the bowl control panel (see exploded view). The short Use is ideal in case a much reduced water consumption is needed. It is particularly employed for the evacuation of liquid organic wastes

ATTENTION
THE BOWL IS ABLE TO DISCHARGE ONLY ORGANIC RESIDUALS AND
TOILET PAPER BIODEGRADABLE

INTERVENTIONS IN CASE OF WORKING PROBLEMS:

1. Non arrival of clean water :
- check the fuse
 - press the “before use” button to check that the main supply regularly reaches the control panel and the inlet pump (single system) or the electrovalve (in case of centralized systems)
2. Outlet pump not working :
- check the fuse
 - turn to a minimum the timer shaft on the control panel back side and then press the “after use” button, to check that the main supply regularly reaches the control panel and the outlet pump
 - after verifying the previous points, inspect the outlet pump located under the bowl in this way :
 - disconnect the main supply from the bowl
 - remove both floor locking screws from the bowl (the two screws located on the rear side of the bowl)
 - by using a screwdriver or a pipe wrench loosen the metal clamp and remove the rubber coupling sleeve between bowl and pump
 - check that the impeller may freely turn and no objects are trapped inside the pump
 - re-assemble the coupling sleeve, tighten the clamp and fix the bowl to the floor again
3. In case of repeated breakage of the fuse :
- follow the same instructions as Point 2

OPERATING:

Control panel with 3 switches
Our toilets with 3 switches control panel has been studied to remain empty when it is not used. Beofre using , the bowls is au-
tomatically filled so ceramic surface with never be dirty from organic residuals. AFTER USE the bowl is automatically flushed
and cleared out.
Operating istructions:
a) before use press “ before use ” button c) short use: single function for the evacuation of liquid organic wastes
b) after use press “ after use ” button
Bidet for marine toilets:
Open a single level tap and adjust the temperature. At the end , press the discharge discharge button in order to clear out.
The discharge button must be pressed before the bowls is completely full.
VERY IMPORTANT: picture number 1
Adjust the circuit of flow after disassembling the system :
+ turn on the LEFT the shaft trimmer the water flow will be increased
- turn on the RIGHT shaft trimmer the
water flow will be reduced To assure a perfect running of the
toilet,on pressing the “before use” button water will have to get
about 5 cm. higher than the round hole level.

SYSTEM AND TANK LEVEL INDICATOR
Code of the 12 V. and 24 V. level indicator:
6500002003 WATER VACUUM
Probe-holder hole: 74 mm.



Combination Combination Reference
printed circuit / colour wires / probes probes – colours colour wires
BIANCO - WHITE probe 1 + lunga + long comune/common
VERDE/ AZZURRO - GREEN/SKYBLUE probe 2 + lunga + long serbatoio – tank
GIALLO - YELLOW probe 3 + corta + short pieno / full
Attenzione: i cavi da attaccare sulla sonda sono quelli già completi di faston.
Caution: the wires to be connected to the probe are those already complete with faston
Coupling. Attention: les câbles à connecter avec la sonde sont ceux déjà complets avec jonction faston
Vorsicht: die am Fuehler anzuschliessenden Kabel sind jene, die mit Fastonschaltung schon ausgestattet werden


YOU WILL NEED THE LEVEL INDICATOR CABLE ONLY IN CASE YOU PROVIDE FOR THE MOUNTING OF THE LEVEL
INDICATOR
RINSE OPTIONS

- 1) Diaphragm pump :optional
remote mounted self-priming pump to bring in
sea,river or lake rinse water. Complete with
Pumpgard strainer.
2) Solenoid valve: optional
assembly for connection to any existing
pressurized water system capable of delivering
2.9 US gpm (11 lpm) or more. Upon request is
available the NON RETOURN VALVE ensures
there is no backflow from the toilet into the
water system.


RINSE OPTIONS
(1) Fresh Water



(2) Raw Water




FIXING:

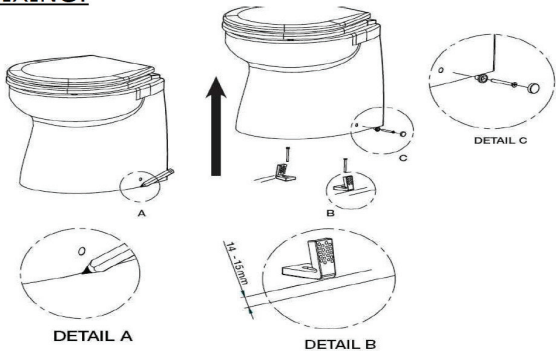


- Now we recommend finishing the rest of the installation (plumbing,
electric,etc)
1. Put the toilet in the selected position.
2. Using the two holes in the toilet and the outer line of the toilet as
guide, mark the location and outer line of the bowl of the holes in the
toilet on the.
3. Remove the bowl. 4. Re-draw a new parallel line approximately 14-
15 mm inside of the line you did in
step 2. 5. Put the assembly bracket on the floor, with the slot horizontal.
6. Mark the middle position of the slot and drill a Ø5mm hole for
eachbracket. 7. Tighten the bracket by using the enclosed Ø6,2mm
screws. (Ensure that they are not to long for your installation) 8. Put the
toilet back in the selected place. 9. Put the one plastic sleeve in each
assembly hole on the toilet. 10. Secure the toilet by using the Ø4,7mm
screws. As the bracket has a lot of small holes, you can make a small
final position adjustment. 11. Put the screw cover on the screw head.
12. Use the sealant around the base, towards the floor.

ELECTRICAL WIRING

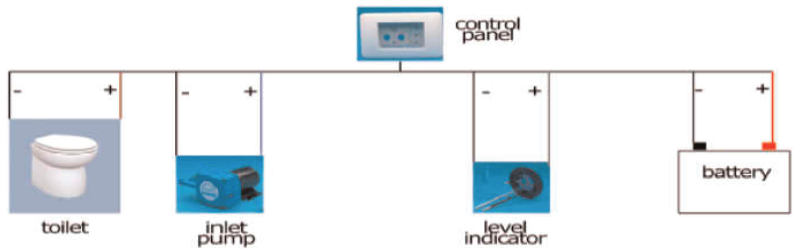


DIMENSIONS

Deluxe models:

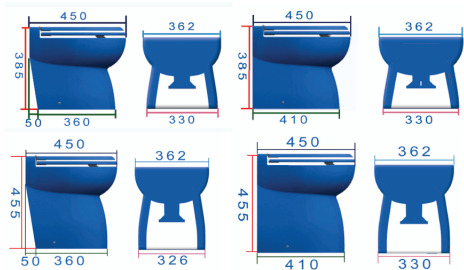


Laguna models:

Description	A	B	C	D	E	F
Laguna electric 12v.	340	411	359	248	316	190/205

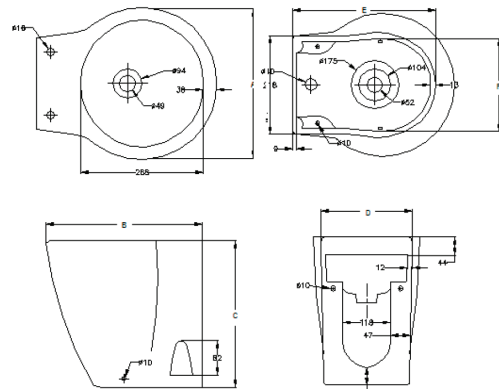

WATERWORKS

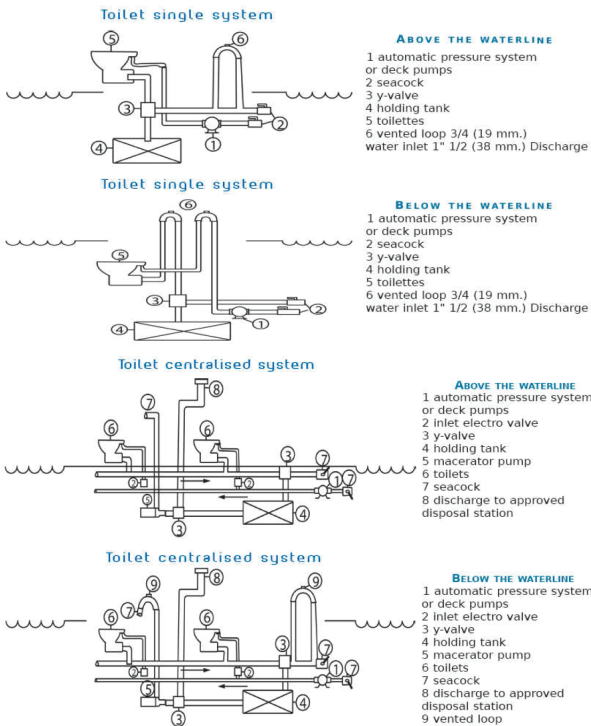

WARRANTY: Products are guaranteed two years. No warranty will be recognized in the following cases:
- if the bowl is broken - if the fitted instructions regarding the electrical system and the directions for use have not been
properly followed Warning: the use of strong detergents to clean the toilet is forbidden, as these products stay on the
inside of the system and burn the pump rubber
seals through. Eventual traces found in the claimed goods will invalidate the warranty.TO TAKE ADVANTAGE OF WAR-
RANTY, ALL ARTICLES
MUST BE SENT BACK COMPLETE WITH ASSEMBLINGINSTRUCTIONS AND EVIDENCE OF PURCHASE.